



SafeDirection
CRASH BARRIER SOLUTIONS



RHINO-STOP® Sky-Edge

Zero Footprint, Conserving Valuable Deck Space

RHINO-STOP® Sky-Edge conserves valuable floor space by positioning the post on the outside edge of the concrete substrate. RHINO-STOP® Sky-Edge complies the 30kN impact requirement of AS/NZS 1170.1.

RHINO-STOP® Sky-Edge may be installed as a standalone post and rail configuration or with balustrade and mesh infill attachments when fall protection for pedestrians is required. The modular design of RHINO-STOP® Sky-Edge and its available attachments allows the system to be configured to suit site requirements using standard components.


The positioning of RHINO-STOP® Sky-Edge allows the full width of the deck to be utilised for parking or vehicle travel.

Specifications

- Compliant to AS/NZS 2890.1: Parking Facilities – Off Street Car Parking.
- Compliant to the 30kN impact load (Type F) described in AS/NZS 1170.1: Structural Design Actions, Part 1.
- Post spacing: 2m.
- Number of anchor bolts per post: 1 off M20.
- Hot dip galvanised.

Features

- Zero footprint - no encroachment of the barrier onto the car park deck.
- Energy-absorbing technology prevents damage to the substrate.
- Fully modular system.
- Can be configured with a balustrade and anti-climb mesh infill when fall protection for pedestrians is required.

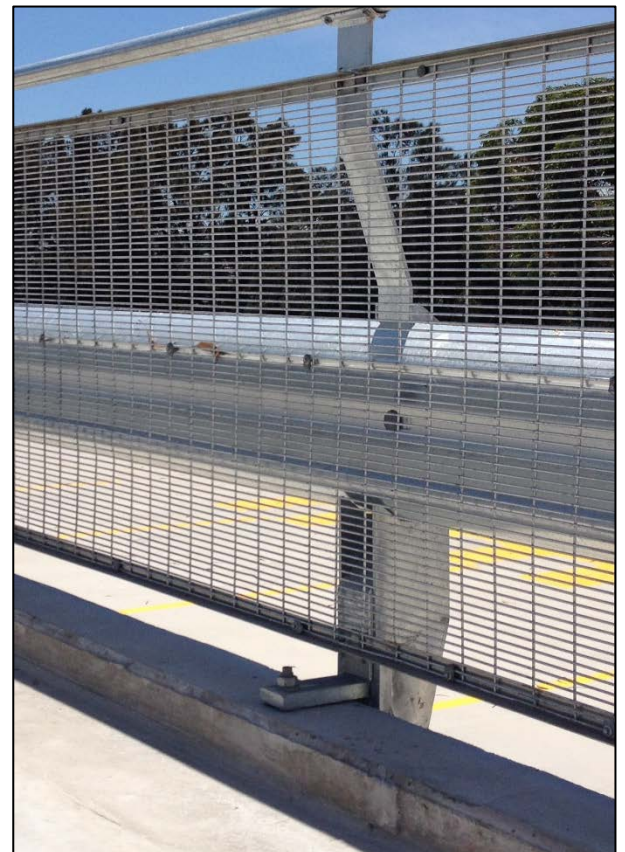



RHINO-STOP® Sky-Edge

Zero Footprint, Conserving Valuable Deck Space



Safe Direction Pty Ltd • ABN 53 156 459 684 • Ph: 1300 063 220 • E: sales@safedirection.com.au